


Roman Blind Fitting Instructions (Cord Lock)


Step 1

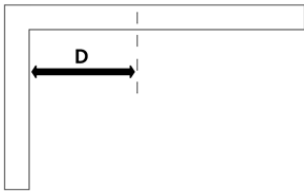

TOP FIXING (A)

Measure and mark the distance (D), allowing for obstructions like handles that protrude into the recess area. Hold each bracket into place and mark the hole positions. Fit each bracket using the screws provided.

Please ensure fixings are suitable for the wall/surface to which you are mounting the brackets.



FACE FIXING (B)


Hold each bracket into place and mark the hole positions. Fit each bracket using the screws provided.

Please ensure fixings are suitable for the wall/surface to which you are mounting the brackets.

POSITIONING

The brackets should be positioned at each end of the headrail approximately 110mm in and intermediately spread across the width as required.

Step 2

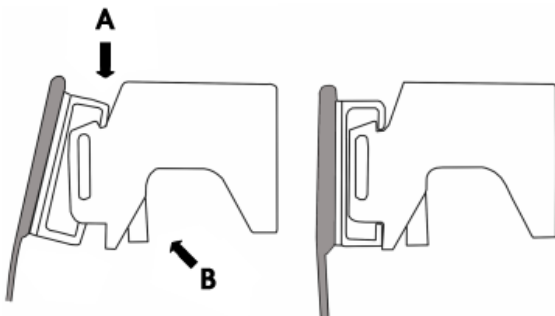

FITTING THE BLIND

Offer the blind up to the brackets and clip/fix in place. Clip the rail onto the brackets by resting the rail onto position 'A' and pressing back towards position 'B'

WARNING

Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.

To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck. Move beds, cots and furniture away from window covering cords.

Do not tie cords together. Make sure cords do not twist and create a loop.


SAFETY DEVICE



Children can be strangled if a safety device is not installed. Always use a safety device to keep cords or chains out of reach of children.

The safety device must be installed at the maximum distance possible from the control mechanism and at least 1.5m from the floor.

Place the safety device on the wall and mark the positioning of the 2 screw holes.

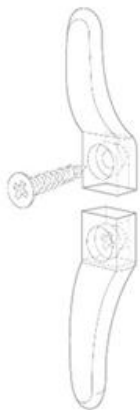

Wrap the cords around the cleats as shown

When the cords are fully accumulated ensure they are secure so when any cord is pulled ne excess cord is released

