

247blinds

CLIP&FIT BLINDS

LET'S GET

MEASURING!




# MEASURING FOR CLIP&FIT BLINDS

You will need a metal tape measure, a ruler, a blunt butter knife and a pen/pencil.

## CHECK WINDOW/DOOR SUITABILITY


An easy way to check if your windows are suitable is by using a gauge, or blunt butter knife. Measure how far the blade slips under the beading to see if it's above the 17mm required. Please take care when using a knife.

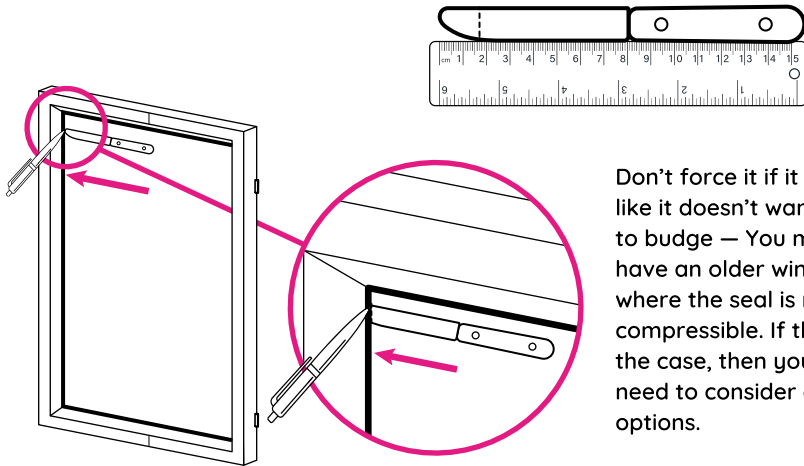


Don't force it if it feels like it doesn't want to budge — You may have an older window where the seal is not compressible. If this is the case, then you'll need to consider other options.

To ensure the best possible fit we require accurate measurements for both the width and drop of the blind.

Measure the full size of the visible glass between the gaskets. Order as glass size.



**NOTE:** The blind projects 35mm from the glass to the front of the folded operating handle. Important for bi-fold door operation.

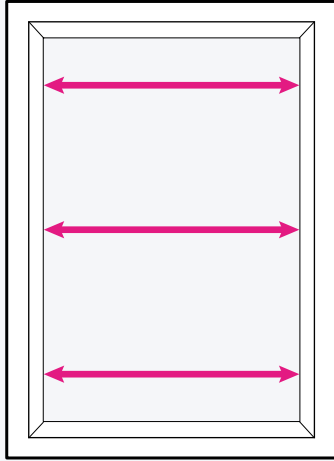

## STEP 1 - MEASURING WIDTH


Take three measurements of the window width.

If there is any variation always use the shortest width to order your blinds. If the windows are particularly large you can take intermediate measurements to check.

## STEP 2 - MEASURING DROP

Take three measurements of the window drop. If there are any variations, then always use the shortest measurement.

You must measure accurately and to the nearest millimetre to ensure a good fit.

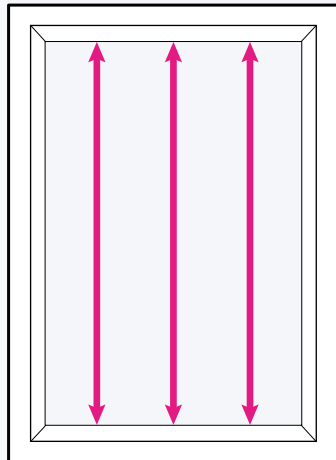

**NOTE:** We also ask you measure the middle area as well to ensure there is no more than a 4mm difference between each measurement. If this is the case, please get in touch with us to talk through your measurements, as we want to ensure the best possible fit for your new blind!

