


ROMAN BLIND

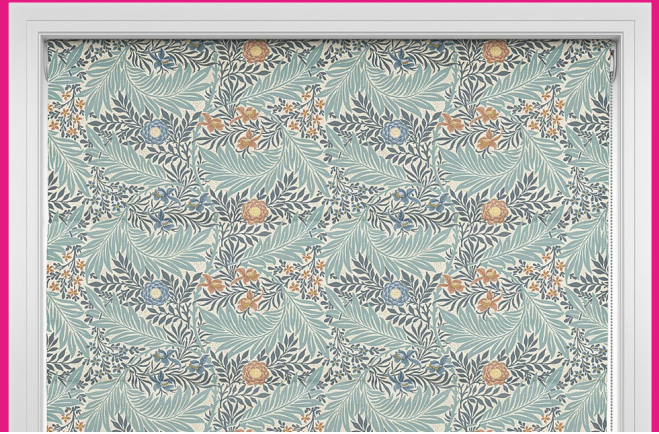

SPECIFICATION

ON MEASURING

Roman blinds have a minimum stack height (this is the height the blind takes up when fully open) of approx. 20cm at the smallest available size. This can vary on the chosen blind and lining fabric

For an accurate stack measurement for your sizes, please contact our customer service team for more information. Please refer to our Roman measuring guide for a comprehensive guide.

ON FITTING

The sidewinder end comes with a chain cover. Please do not attempt to remove this cover.

When lifting to fit, please ensure you peel the back of the fabric off the headrail, using the Velcro and lift the blind in place using the headrail. This will avoid creasing the fabric face when installed.

GENERAL OVERVIEW

Operation: Chrome chain operated, Left or Right side.

Chain Drop: This will be supplied 2/3 of the provided blind drop with a safety P-clip

Gear Ratio: 1:1

Finish: Stacked

Joins: No joins <1350mm | 3 Panels for 1351-2600mm (20/60/20 layout)

Fabric Rod Pockets: Ivory fabric pockets

Rod/Fold Count: Varies by drop (e.g., 2 folds <700mm, up to 7 folds at 3200mm)

Cords: Based on width (e.g., 2 cords up to 1050mm)

Headrail Composition: Powder coated Aluminium

Headrail: 48mm depth (including fabric) X 50mm height

Bracket: Universal Top/Face Fix

Bracket Size: 44mm depth x 30mm height

Bottom Bar: 25mm Aluminium, sealed in 35mm hem

Side Hems: 13mm | **Bottom Hem:** 35mm

Thread: Colour-matched to fabric

Back Blind Cord: White

Child Safety Cord Clip: Transparent Plastic

Child Safety Max Weight Load: 6kg

Lining Options:

- Standard: Polycotton White, 75% polyester / 25% cotton
- Optional: Polycotton White Blackout, 100% polyester with acrylic backing
- Manufacturing Tolerance: $\pm 3-5$ mm