

247 Blinds – Pleated Blinds – Corded Specification

Available as standard (bottom up) or top down, bottom-up configuration options.

These pleated blinds are free-hanging and are fitted like standard blinds with top or face fix brackets.

Frame colours are available in White, Anthracite or Silver.



Corded – Standard

Standard (Bottom up) blinds mean you push the blind from the bottom to close.

Standard (Bottom up) system is available at these sizes - 300mm - 2100mm drop & 500mm - 2200mm width.



Corded – Top Down, Bottom Up

Top down, bottom up means you can move the blind up or down using the top and bottom rails.

Top down, bottom up system is available at these sizes - 300mm - 2100mm drop & 500mm - 2200mm width.

The minimum number of brackets provided is 2, with a maximum of 5 sent over sizes of 2000mm width.

On a corded pleated free-hanging blind - The fabric width is minus 6mm less than the headrail width (3cm each side).

A white cord condenser is provided at these sizes - 2 QTY at 500mm - 1820mm width | 4 QTY at 1820mm - 2200mm width.

Part



Standard headrail. Showing cord control & white condenser.

The headrail is 26mm depth x 12mm height.




Top Down, Bottom up, headrail



Top Down, Bottom Up Top Rail

Showing cord control & white condenser

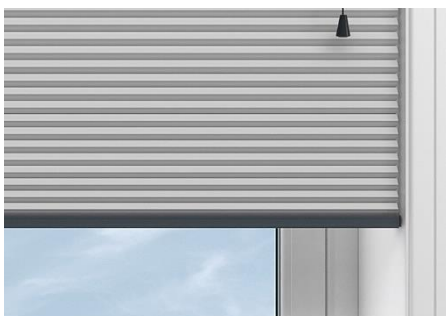

Bottom Rail

The bottom rail is 27mm depth x 12mm height.