

247 Blinds – Pleated Blinds – Cordless Specification

Available as standard (bottom up) or top down, bottom-up configuration options.

These pleated blinds are free-hanging and are fitted like standard blinds with top or face fix brackets.

Frame colours are available in White, Anthracite or Silver.




Cordless – Standard

Standard (Bottom up) blinds mean you push the blind from the bottom to close.

Standard (Bottom up) system is available at these sizes:-

300mm - 2100mm drop

500mm - 2400mm width.

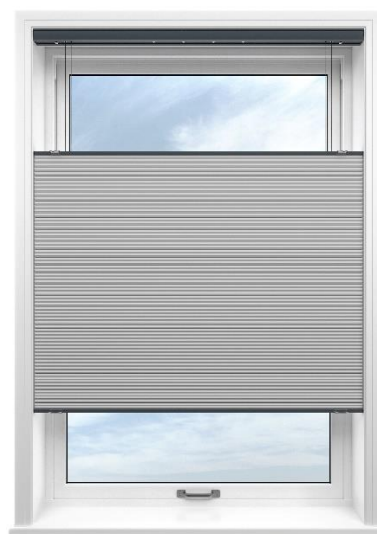

Cordless – Top Down, Bottom Up

Top down, bottom up means you can move the blind up or down using the top and bottom rails.

Top down, bottom up system is available at these sizes:-

300mm - 2100mm drop

812mm - 2100mm width.

The fabric is 25mm and will sit central underneath the headrail.

Brackets are provided, the number depends on the width. The minimum amount of brackets provided is 2, with a maximum of 5 sent over sizes of 1700mm width.

On a cordless pleated freehanging blind - The fabric width is minus 4mm less than the headrail width (2cm each side).

Part



Standard headrail

On a cordless pleated freehanging blind - The headrail is 44.18mm depth x 39mm height on the shortest side.
Longest (curved) side the headrail is 47mm depth x 39mm height.



Top Down, Bottom up, headrail

The top down, bottom up option has is operated by pulling on the bottom rail.



Top Down, Bottom up, headrail

On a cordless pleated freehanging blind - The headrail is 44.18mm depth x 39mm height on the shortest side.
Longest (curved) side the headrail is 47mm depth x 39mm height.



Top Down, Bottom Up top tail

The top down, bottom up option has a central pull tab on the bottom and the top rails. This is not present on the bottom up.



Top Down, Bottom Up Bottom Rail

The bottom rail is 27mm depth x 12mm height.

The top down, bottom up option has a central pull tab on the bottom and the top rails. This is not present on the bottom up.