


ULTRA BLACKOUT

SPECIFICATION

Designed for maximum light blocking, these blinds prevent light from passing through or around the edges. The honeycomb blackout fabric is securely enclosed within a sturdy metal frame, ensuring optimal darkness.

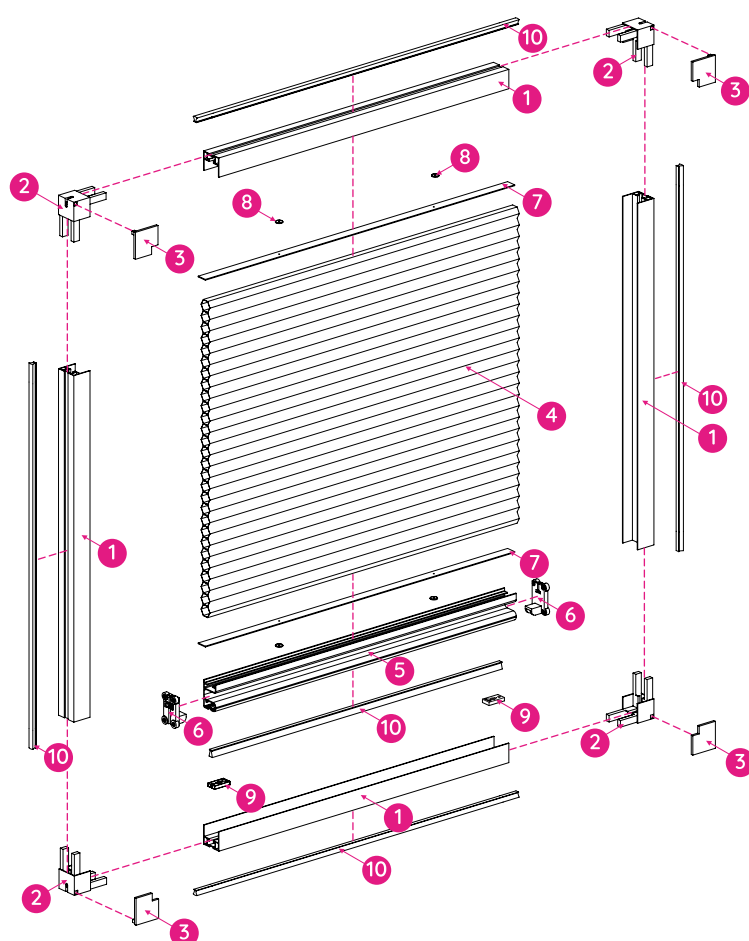


- Ideal for bedrooms of all ages
- Available only with the “recess” fitting option
- Comes with screws, rawl plugs, and optional foam strips
- Features a tensioned system - operate by pulling down the bottom bar
- Total frame depth is approximately 3.3cm

The included white foam strips are optional and can be used if your window isn't perfectly square, leaving small light gaps around the frame. To apply, simply peel off the adhesive backing and stick the strips behind the frame where it meets the wall.

These honeycomb fabrics have a blackout layer and provide excellent thermal insulation. Their comb-like structure allows air to flow between layers, helping to keep your home cooler in summer and warmer in winter.

To prevent condensation buildup, make sure to install your blind at least 5cm away from the glass.

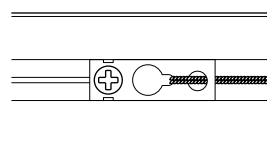

To adjust the tension of your blind after installation, lift the fabric to locate the small silver metal cord tensioners inside the bottom frame. Use a crosshead screwdriver to turn clockwise to increase tension or counterclockwise to release it.

Blinds have a minimum stack height (this is the height the blind tapes up when fully open) of 10cm at the smallest size.

Component

Material

1	Frame - 2.5cm (w) x 3cm (d) + Additional Soft Grey Brush (Top & Bottom Of Frame) - Approx. 3-4mm (h)	Aluminium
2	Corner Pieces	Plastic
3	Colour-Matched Corner Caps	Plastic
4	Honeycomb Blackout Fabric	100% Polyester
5	Bottom Bar	Aluminium
6	Side Runners	Plastic
7	Fabric Strip (Hidden By Headrail)	Plastic
8	Cord Guide	100% Polyester
9	Adjustable Cord Tensioner	Aluminium
10	Light blocking strips - Approx. 4mm (d)	Foam